

RG-EW1800GX PRO

AX1800 Wi-Fi 6 Dual-band Gigabit Mesh Router



Highlights

- Unprecedented wireless experience with Wi-Fi 6
- Wi-Fi 6 ultra-high-speed
- Strong signals received
- Exclusive Reyee mesh providing full-space-coverage Wi-Fi solution
- Multi-user support
- Control of your home network at your fingertips

/ Highlight Features

RG-EW1800GX PRO

An Unprecedented Wireless Experience in WiFi 6

All-round upgrade of Wi-Fi performance,
Improve the overall networking experience for users.



5 Gigabit
Ethernet ports



1800M
Dual-band



802.11ax



Enter the Era of Wi-Fi 6 Speed


With 1024-QAM and the latest 802.11ax standard,
the 1800GX PRO delivers a dual-band concurrent transmission rate of up to 1800Mbps,
providing consistent **high-speed** internet experience.



Highlight Features

Strong Signal Received, Feels like “wall-less”


Beamforming technology and built-in signal amplifiers combine to enhance strong Wi-Fi signal throughout your home.

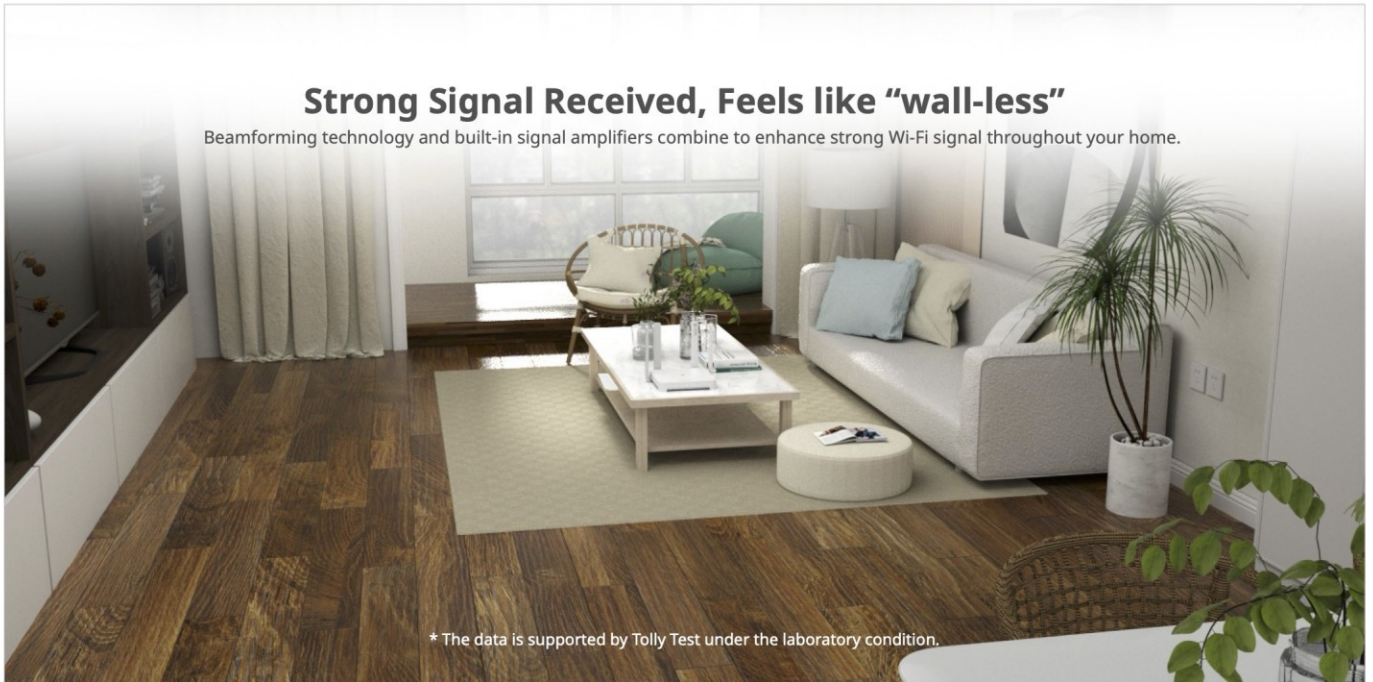

* The data is supported by Tolly Test under the laboratory condition.

Seamless Roaming, Full Space Coverage Wi-Fi Solutions

Amazed by **Reyee Mesh**

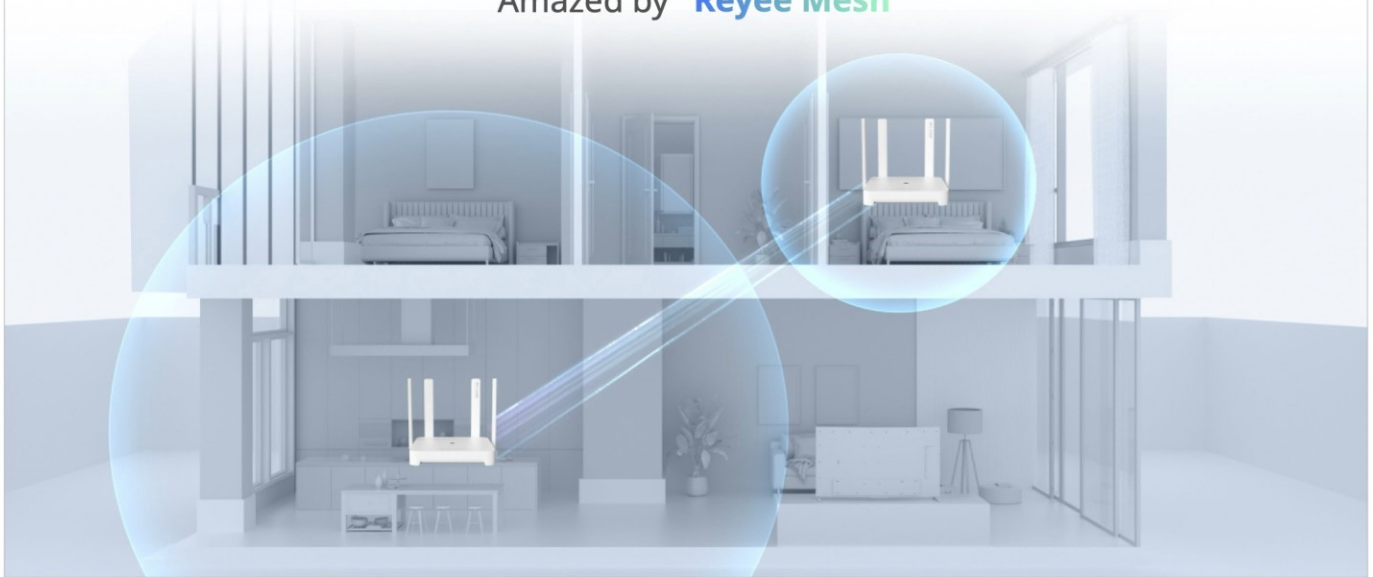

Highlight Features


Born For Multi-user

Upgraded **MU-MIMO** version provides 2.5x greater capacity to connect more terminals.
New-Gen tech "**BSS coloring**", Smart anti-interference from nearby Wi-Fi signals.





Take Control of Your Home Network at Fingertips

Set up your home network in **Reyee Router App** in two minutes. More **Life-time Free** functions are waiting for you to Explore, Experience, Expect.

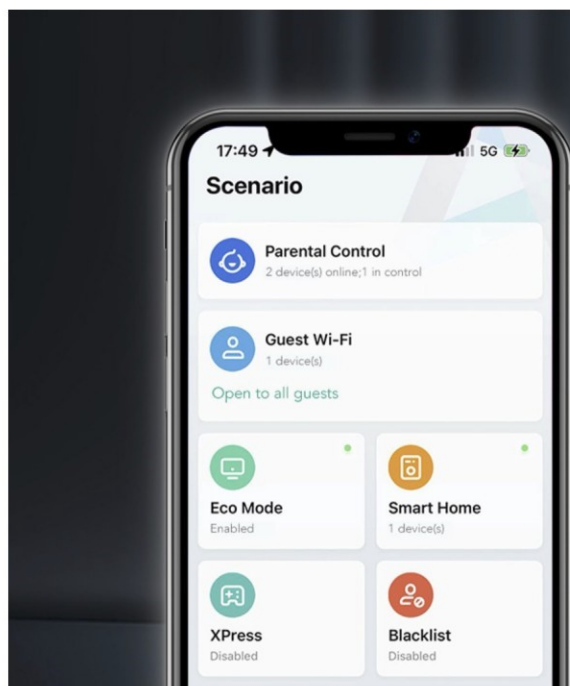

Remote Management Parental Control Smart Home



Hardware Specifications

Model	RG-EW1800GX PRO
Wi-Fi Radio	
Operating band	IEEE 802.11b/g/n/ax, 2.400GHz~2.4835GHz; IEEE 802.11a/n/ac/ax, 5.150GHz~5.350GHz; IEEE 802.11a/n/ac/ax, 5.470GHz~5.725GHz; IEEE 802.11a/n/ac/ax, 5.725GHz~5.850GHz;
FEM	EPA
Max. Wi-Fi Speed	2.4 GHz, 573 Mbps 5 GHz, 1200 Mbps
Maximum transmit power	2.4 GHz: 802.11b:25dBm 802.11g:6M 25dBm; 54M 21dBm 802.11n:MCS0 25dBm MCS7:21dBm 802.11ax:MCS11 19dBm 5 GHz: 802.11a:6M 25dBm; 54M 21dBm 802.11n:MCS0 25dBm MCS7:21dBm 802.11ac:MCS0 25dBm;MCS9 20dBm 802.11ax:MCS0 25dBm;MCS9 20dBm;MCS11 18dBm Note: The transmit power varies according to regulations in different countries and regions.
MIMO	2.4 GHz, 2 x 2 5 GHz, 2 x 2
Wi-Fi standard	Wi-Fi 6 (IEEE 802.11 ax)
Antenna	
Antenna	4 x external antennas
Antenna gain (2.4 GHz)	4.5 dBi
Antenna gain (5 GHz)	6 dBi
Certification and Regulatory Compliance	
Certification	CE
Dimensions and Weight	
Product dimensions (W x D x H)	180 mm × 180 mm × 30 mm (7.09 in. × 7.09 in. × 1.18 in.) (excluding antennas)
Weight	0.55 kg (1.21 lbs) (without packaging materials) 1.15 kg (2.54 lbs) (with packaging materials)
Environment and Reliability	

/ Hardware Specifications

Model	RG-EW1800GX PRO
Operating humidity	5% RH to 95% RH (non-condensing)
Operating temperature	-10 °C to +45 °C (14 °F to 113 °F)
Storage humidity	5% RH to 95% RH (non-condensing)
Storage temperature	-40 °C to +70 °C (-40 °F to 158 °F)
Port Specifications	
LEDs	1 x system status LED 1 x Mesh LED 5 x Ethernet port LEDs
LAN ports	4 x 10/100/1000BASE-T ports
WAN ports	1 x 10/100/1000BASE-T port
Power Supply and Consumption	
Power supply	DC 12 V 1.5 A
Product Information	
Warranty	3 years
System Specifications	
RAM	256 MB

Software Specifications

Model	RG-EW1800GX PRO
Basic Configurations	
LED management	Yes
Internet access mode	PPPoE, DHCP, Static IP, WISP, L2TP
Preconfiguration	Yes
Reset and keep configurations	Yes
Restoring factory defaults	Yes
Configuration backup	Yes
Local upgrade	Yes
Online upgrade	Yes
Scheduled upgrade	No
AP mode	Yes
Ethernet Switching	
WAN port aggregation	No
LAN port aggregation	No
Specifying the VLAN tag	Yes
IP Service	
Port mapping	Yes
ARP binding	Yes
Number of ARP binding entries	64
DDNS	Yes
No-IP DNS	Yes
Ruijie DDNS	Yes
NAT-DMZ	Yes
Number of port mapping entries	50

Software Specifications

Model	RG-EW1800GX PRO
UPnP	Yes
Behavior Management	
Parental control	Yes
Client access control (based on MAC addresses)	Yes
Client access control (based on time)	Yes
Maximum number of controlled clients	32
Maximum number of parental control policies	32
Selecting clients from the client list to block their access to the Internet	Yes
Specifying MAC addresses of controlled clients	Yes
Ethernet Interface	
MAC address cloning	Yes
VLAN-based IPTV	Yes
Flow Control	
Flow control based on number of users	Yes
Standalone/Shared mode	Yes
Interface flow control	Yes
IPTV/VLAN	
Multiple IPTV ports	Yes
Multicast	
IGMP proxy	Yes
IGMP snooping	Yes
Note: Not supported by wired connections when IPTV is turned on	
Network Management and Monitoring	

Software Specifications

Model	RG-EW1800GX PRO
Line detection	Yes
Arabic	Yes
Chinese (Hong Kong Traditional)	Yes
Chinese (Simplified)	Yes
English	Yes
Indonesian	Yes
Italian	Yes
Russian	Yes
Spanish (Latin America)	Yes
Thai	Yes
Turkish	Yes
Vietnamese	Yes
Ruijie Cloud management	Yes
Scheduled device restart	Yes
eWeb login password length	8 to 63 characters
Wired repeater mode	Yes
Wireless repeater mode	Yes
WISP mode	Yes
Rate Limiting	
Client-based rate limiting	Yes
Reyee Mesh 3.0	
Reyee Mesh 3.0	Yes
Automatic switching between wired and wireless repeater mode	Yes

Software Specifications

Model	RG-EW1800GX PRO
Recommended hop count	2
Maximum number of clients	192
Maximum number of devices	32
Security	
Encryption mode	Yes
System Performance Capacity	
Maximum number of concurrent clients	64 (2.4 GHz) 128 (5 GHz)
Recommended number of concurrent clients	12 (2.4 GHz) 36 (5 GHz)
IPTV/IGMP client capacity	5
IPTV/IGMP multicast capacity	5
IPTV/IGMP wired forwarding performance	20 Mbps
Recommended camera limit	6 (2.4 GHz) 16 (5 GHz)
VPN	
Number of concurrent tunnels supported by the OpenVPN server	8
Certificate authentication	Yes
OpenVPN bandwidth	13 Mbps
OpenVPN client	Yes
OpenVPN server	Yes
Server domain name configuration	Yes
Username and password authentication	Yes
Number of concurrent tunnels supported by the PPTP VPN server	30
PPTP VPN client	Yes

Software Specifications

Model	RG-EW1800GX PRO
PPTP VPN server	Yes
Wireless Configuration	
Guest Wi-Fi	Yes
WLAN	
1024-QAM	Yes
MLO	No
DFS	Yes
802.11k/v roaming	Yes
Wi-Fi blocklist capacity	64
SSID hiding	Yes

Package Contents

Model	RG-EW1800GX PRO
Accessories	
Ethernet cable	1
Power adapter	1
Device	
Device	1
Manual	
User Manual	1
Warranty Card	1

Ruijie | ReYee

 **R**edefine your easy network



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>