



RG-EW7200BE PRO BE7200 Wi-Fi 7 Gaming Router



Highlights


- Unmatched Speed with Wi-Fi 7
- 2 x 2.5 Gbps WAN ports
- 3 x 2.5 Gbps and 4 x 1 Gbps LAN ports
- 9 antennas and 9 FEMs
- Enterprise-grade flagship chip
- Advanced gaming features

Date: 2025.10.11



Make Barriers None Make Distance Zero

Introducing the RG-EW7200BE PRO, a cutting-edge PVIFIZ router offering speeds up to 7200 Mbps. Featuring MLO and MRU for superior performance, it delivers exceptional coverage and stability. Experience unparalleled networking performance with the RG-EW7200BE PRO.

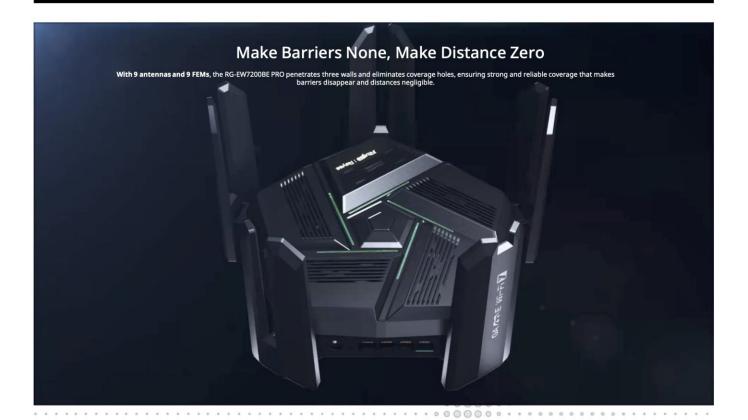

Highlight Features













Highlight Features





/ Highlight Features





/ Hardware Specifications

Model	RG-EW7200BE PRO
Wi-Fi Radio	
Operating band	IEEE 802.11b/g/n/ac/ax/be,2.400GHz~2.4835GHz;IEEE 802.11a/n/ac/ax/be,5.150GHz~5.350GHz;IEEE 802.11a/n/ac/ax/be,5.470GHz~5.725GHz;IEEE 802.11a/n/ac/ax/be,5.725GHz~5.850GHz
FEM	2.4GHz: iPA 5GHz: EPA
Max. Wi-Fi Speed	2.4 GHz, 1377 Mbps 5 GHz, 5765 Mbp
Maximum transmit power	2.4 GHz: 802.11b:22dBm 802.11g:6M 22dBm; 54M 20dBm 802.11n:MCS0 22dBm; MCS7 19dBm 802.11ac:MCS0 22dBm;MCS9 18dBm 802.11ax:MCS0 22dBm;MCS11 16.5dBm 802.11be:MCS0 25dBm;MCS13 15.5dBm 5 GHz: 802.11a:6M 26dBm; 54M 22dBm 802.11n:MCS0 26dBm MCS7:21.5dBm 802.11ac:MCS0 26dBm;MCS9 21dBm 802.11ax:MCS0 26dBm;MCS11 19dBm 802.11ax:MCS0 26dBm;MCS13 17dBm Note: The transmit power varies according to regulations in different countries and regions.
MIMO	2.4 GHz, 4 x 4 5 GHz, 4 x 4
Wi-Fi standard	Wi-Fi 7 (IEEE 802.11 be)
Antenna	
Antenna	9 x external antennas
Antenna gain (2.4 GHz)	4 dBi
Antenna gain (5 GHz)	5 dBi
Certification and Regulatory Compliance	
Certification	CE, CB
Dimensions and Weight	
Product dimensions (W x D x H)	259 mm x 248 mm x 153 mm (10.2 in. x 9.76 in. x 6.02 in.)
Weight	0.739 kg (1.63 lbs) (without packaging materials) 1.44 kg (3.17 lbs) (with packaging materials)

/ Hardware Specifications

Model	RG-EW7200BE PRO
Environment and Reliability	
Operating humidity	5% RH to 95% RH (non-condensing)
Operating temperature	0 °C to +40 °C (32 °F to 104 °F)
Storage humidity	5% RH to 95% RH (non-condensing)
Storage temperature	-40 °C to +70 °C (-40 °F to 158 °F)
Port Specifications	
LEDs	5 x atmosphere LEDs 1 x system status LED
LAN ports	4 x 10/100/1000/2500BASE-T ports 4 x 10/100/1000BASE-T ports
Number of LAN/WAN ports	1 x 10/100/1000/2500BASE-T port
WAN ports	1 x 10/100/1000/2500BASE-T port
Power Supply and Consumption	
Power supply	DC 12 V 3 A
Product Information	
Warranty	3 years
System Specifications	
RAM	1GB

Model	RG-EW7200BE PRO
	Basic Configurations
LED management	Yes
Internet access mode	PPPoE, DHCP, Static IP, WISP, L2TP
Preconfiguration	Yes
Reset and keep configurations	Yes
Restoring factory defaults	Yes
Configuration backup	Yes
Local upgrade	Yes
Online upgrade	Yes
Scheduled upgrade	No
AP mode	Yes
	Ethernet Switching
WAN port aggregation	Yes
LAN port aggregation	Yes
Specifying the VLAN tag	Yes
	IP Service
Port mapping	Yes
ARP binding	Yes
Number of ARP binding entries	64
DDNS	Yes
No-IP DNS	Yes
Ruijie DDNS	Yes
NAT-DMZ	Yes
Number of port mapping entries	50

Model	RG-EW7200BE PRO
UPnP	Yes
Behavior Management	
Parental control	Yes
Client access control (based on MAC addresses)	Yes
Client access control (based on time)	Yes
Maximum number of controlled clients	32
Maximum number of parental control policies	32
Selecting clients from the client list to block their access to the Internet	Yes
Specifying MAC addresses of controlled clients	Yes
Ethernet Interface	
MAC address cloning	Yes
VLAN-based IPTV	Yes
	Flow Control
Flow control based on number of users	Yes
Standalone/Shared mode	Yes
Interface flow control	Yes
IPTV/VLAN	
Multiple IPTV ports	Yes
Multicast	
IGMP proxy	Yes
IGMP snooping	Yes Note: Not supported by wired connections when IPTV is turned on
Network Management and Monitoring	

Model	RG-EW7200BE PRO
Line detection	Yes
Arabic	Yes
Chinese (Hong Kong Traditional)	Yes
Chinese (Simplified)	Yes
English	Yes
Indonesian	Yes
Italian	Yes
Russian	Yes
Spanish (Latin America)	Yes
Thai	Yes
Turkish	Yes
Vietnamese	Yes
Ruijie Cloud management	Yes
Scheduled device restart	Yes
eWeb login password length	8 to 63 characters
Wired repeater mode	Yes
Wireless repeater mode	Yes
WISP mode	Yes
	Rate Limiting
Client-based rate limiting	Yes
Reyee Mesh 3.0	
Reyee Mesh 3.0	Yes
Automatic switching between wired and wireless repeater mode	Yes

Model	RG-EW7200BE PRO
Recommended hop count	2
Maximum number of clients	192
Maximum number of devices	32
Security	
Encryption mode	Yes
Sy	stem Performance Capacity
Maximum number of concurrent clients	128 (2.4 GHz) 256 (5 GHz)
Recommended number of concurrent clients	16 (2.4 GHz) 64 (5 GHz)
IPTV/IGMP client capacity	5
IPTV/IGMP multicast capacity	5
IPTV/IGMP wired forwarding performance	25 Mbps
Recommended camera limit	6 (2.4 GHz) 16 (5 GHz)
	VPN
Number of concurrent tunnels supported by the OpenVPN server	8
Certificate authentication	Yes
OpenVPN bandwidth	13 Mbps
OpenVPN client	Yes
OpenVPN server	Yes
Server domain name configuration	Yes
Username and password authentication	Yes
Number of concurrent tunnels supported by the PPTP VPN server	30
PPTP VPN client	Yes

Model	RG-EW7200BE PRO
PPTP VPN server	Yes
Wireless Configuration	
Guest Wi-Fi	Yes
WLAN	
1024-QAM	Yes
MLO	Yes
DFS	Yes
802.11k/v roaming	Yes
Wi-Fi blocklist capacity	64
SSID hiding	Yes

| Package Contents

Model	RG-EW7200BE PRO
Accessories	
Ethernet cable	1
Power adapter	1
Device	
Device	1
Manual	
User Manual	1
Warranty Card	1

Ruijie | Rcycc

Redefine your easy network



Ruijie Networks Co., Ltd.
Official Website: https://Reyee.Ruijie.com