

RG-EG105GW-X

Wi-Fi 6 AX3000 High-performance All-in-One Wireless Router



Highlights

- Professional and high-performance Wi-Fi 6 business VPN router.
- Easy network construction with all-in-one wireless router.
- One-Click Reyee Mesh.
- Diverse enterprise-level features for different service scenarios.
- Securely monitoring the NVR/IPC/internal server anytime from anywhere.

Highlight Features

Best-in-class All-in-One Wireless Router

A professional and high performance Wi-Fi 6 wireless router for small size businesses.



Wi-Fi 6
AX3000



5 * 5dBi
Antenna



Reyee
Mesh



4 WAN
Load Balancing



VPN
IPSec, OpenVPN,
L2TP, PPTP, etc.




Free Cloud
Management

Enter the Era of Ultra-high Wi-Fi 6 Speed

With a revolutionary combination of **OFDMA** and **1024QAM**, the latest **802.11ax** standard, and the **160MHz** band,

RG-EG105GW-X wireless aggregation rate reaches 2.976Gbps.

RG-EG105GW-X  **2976 Mbps**

RG-EG105GW(T)  1267Mbps




Highlight Features



Highlight Features

New Efficient Way of Application/Bandwidth Management

Application Based Bandwidth Policy

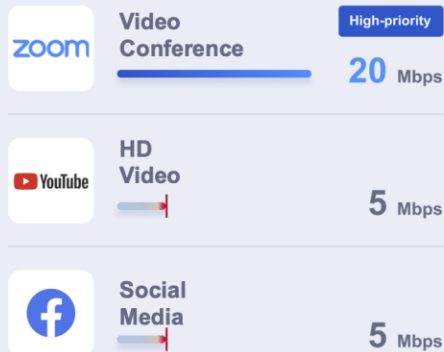


User Based Bandwidth Policy



Cloud, Make Your Business Easy

- Reeye free DDNS
- Cloud portal authentication
- Remote monitoring and maintenance
- Upgrade firmware via Cloud
- APP library dynamic update

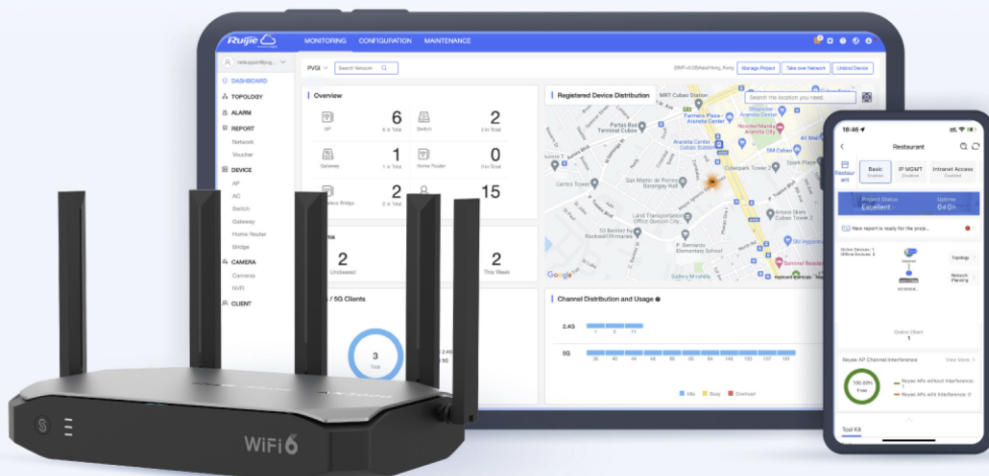

/ Hardware Specifications

Model	RG-EG105GW-X
Port Specifications	
Total number of RJ45 ports	5
Number of 10/100/1000BASE-T ports	5
Maximum number of LAN ports	4
Maximum number of WAN ports	4
Number of fixed LAN ports	1
Number of fixed WAN ports	1
Number of LAN/WAN ports	3
LEDs	1 x system status LED 3 x mesh LEDs
Reset button	1
USB port	1 x USB 3.0 port
System Specifications	
CPU	MT7981A, dual-core processor, 1.3 GHz clock frequency
Flash memory	128 MB SPI NAND Flash
RAM	512 MB DDR3
Power Supply and Consumption	
Power supply	Fixed power supply
Dimensions of the DC connector	No
Maximum power consumption	20 W
Dimensions and Weight	
Package dimensions (W x D x H)	418 mm x 368 mm x 65 mm (16.46 in. x 14.49 in. x 2.56 in.)
Product dimensions (W x D x H)	283 mm x 172 mm x 46 mm (11.14 in. x 6.77 in. x 1.81 in.) (excluding the antennas and foot pads)
Shipping weight	1.71 kg (3.77 lbs)

/ Hardware Specifications

Model	RG-EG105GW-X
Weight	1.2 kg (2.65 lbs.) (without packaging materials)
Environment and Reliability	
Cooling	Natural cooling
Fan	Fanless design
IP rating	No
Mounting options	Desk
Operating humidity	5% RH to 95% RH (non-condensing)
Operating temperature	0°C to 40°C (32°F to 104°F)
Storage humidity	5% RH to 95% RH (non-condensing)
Storage temperature	−40°C to +70°C (−40°F to +158°F)
Surge protection	Service port: ±2 kV for common mode Power connector: ±4 kV for common mode and ±2 kV for differential mode

Software Specifications

Model	RG-EG105GW-X
System Performance Capacity	
Maximum number of concurrent sessions	30000
Recommended number of concurrent clients	160
Throughput	1200 Mbps
Basic Configurations	
AC mode	No
Automatically identifying the Internet access mode and obtaining IP addresses	Yes
Automatically learning the PPPoE username and password of other routers	Yes
Configuration backup	Yes
Internet access mode	Static IP address Static IPv6 address Dynamic IP address Dynamic IPv6 address PPPoE
Local upgrade	Yes
Log upload	Yes
Online upgrade	Yes
Restoring factory defaults	Yes
System language	Yes
Authentication	
Portal authentication	Yes
One-click authentication	Yes
Password authentication	Yes
SMS-based authentication	Yes

Software Specifications

Model	RG-EG105GW-X
Voucher authentication supported by Ruijie Cloud portal page	No
Cloud portal authentication	Yes
Local portal authentication	Yes
QR code authentication	Yes
Custom portal page	No
Account-based authentication supported by Ruijie Cloud portal page	No
CHAP, MS-CHAPv1, MS-CHAPv2	Yes
Delivery through Ruijie Cloud portal page	No
802.1X authentication	Yes
PPPoE server	Yes
Number of accounts supported by the PPPoE server	100
Number of concurrent clients supported by the PPPoE server	35
PAP	Yes
RADIUS authentication	Yes
RADIUS flow control authorization	No
RADIUS proxy server	Yes
Third-party authentication	No
Ethernet Interface	
Avoiding IP address conflicts on WAN interfaces	Yes
Load balancing	Yes
MAC address cloning	Yes

Software Specifications

Model	RG-EG105GW-X
Multiple WAN interfaces on the same network segment	Yes
PPPoE clients	Yes
Ethernet Switching	
Link aggregation	No
LLDP	No
VLAN	Yes
Maximum number of VLANs	16
VLAN configuration supported on LAN ports	Yes
Super-VLAN	No
VLAN priority	Yes
Number of MAC address entries to be filtered	256
Gateway Features	
WAN failover	Yes
Application priority	Yes
Application recognition	Yes
Behavior management	Yes
Flow control	Yes
Time-based blocking policy	Yes
IP address-based blocking policy	
Website filtering: custom URL	Yes
Traffic audit	Yes
URL audit log	Yes
Audit log server	Yes
Audit log storage	No

Software Specifications

Model	RG-EG105GW-X
Uploading audit logs to a server	Yes
IP Routing	
Bandwidth aggregation	Yes
BGP	No
BGP4	No
BGP4+	No
ECMP	No
IPv4 static route	Yes
IPv6 PBR	Yes
IS-ISv4	No
IS-ISv6	No
Load balancing based on flows	Yes
Load balancing based on source IP addresses	Yes
Load balancing based on the interface weight	Yes
OSPFv2	No
OSPFv3	No
RIP	Yes
RIPng	Yes
IP Service	
3322.org	Yes
ALG	Yes
ARP binding	Yes
Maximum number of ARP entries	1024

Software Specifications

Model	RG-EG105GW-X
Proxy ARP	No
Cloudflare	Yes
DHCP client	Yes
DHCP server	Yes
DHCP relay	No
Option 43	Yes
Option 138	Yes
Static/Dynamic NAT	Yes
NAT-PT	No
NAT loopback	Yes
DNS client	Yes
DNS proxy	Yes
DNS server	Yes
No-IP DNS	Yes
IPTV	Yes
IPv4 ping	Yes
IPv6	Yes
IPv6 ping	Yes
Number of port mapping entries	256
Port mapping	No
DDNS	Yes
Ruijie DDNS	Yes
Alibaba Cloud DDNS	Yes
UPnP	Yes

Software Specifications

Model	RG-EG105GW-X
MPLS	
MPLS L2VPN	No
Network Management and Monitoring	
Web management	Yes
Ruijie Cloud management	Yes
Management on Ruijie Reyee App	Yes
Remotely monitoring devices through Ruijie Reyee App	Yes
Restarting devices through Ruijie Reyee App	Yes
Upgrading device software version through Ruijie Reyee App	Yes
Fault diagnosis	Yes
FTP client (IPv4 address)	No
FTP server (IPv4 address)	No
TFTP client (IPv4 address)	Yes
NTP client	Yes
NTP server	No
Scheduled device restart	Yes
SNMPv1, v2c, and v3	Yes
SON	Yes
Web login information	Default IP Address: 192.168.110.1 Default password: admin
SD-WAN	
SD-WAN	Yes
Number of tunnels supported by SD-WAN	96

Software Specifications

Model	RG-EG105GW-X
Maximum number of SD-WAN branches	32
Active/Standby mode (automatically switching to the standby interface when the active interface fails)	Yes
Public IPv4 probing for an egress network	Yes
Security	
Extended ACL	No
IPv6 ACL	Yes
Malformed packet attack defense	Yes
Fragmentation attack defense	Yes
Teardrop attack defense	Yes
LAND attack defense	Yes
SYN flood attack defense	Yes
Smurf attack defense	Yes
IP attack defense	Yes
Disabling ping	Yes
Stateful firewall	Yes
IP-MAC binding	Yes
Network sharing prevention	Yes
Security log	Yes
Security zone	Yes
User group-based connection limiting	Yes
VPN	
IPsec VPN	Yes

Software Specifications

Model	RG-EG105GW-X
IPsec VPN bandwidth	100 Mbps
Maximum number of branches in IPsec VPN networking	32
L2TP VPN	Yes
L2TP VPN bandwidth	400 Mbps
Maximum number of branches in L2TP VPN networking	32
OpenVPN	Yes
OpenVPN bandwidth	140 Mbps
Maximum number of branches in OpenVPN networking	32
PPTP VPN	Yes
PPTP VPN bandwidth	400 Mbps
Maximum number of branches in PPTP VPN networking	32
Easy VPN 1.0	No
Number of VPN accounts for L2TP, PPTP, and OpenVPN	200
WLAN	
Forcibly disconnecting clients with low-weak signals	Yes
Global blocklist and allowlist	Yes
Wireless Intelligent Optimization (WIO)	Yes

Package Contents

Model	RG-EG105GW-X
Accessories	
Power adapter	No
Power cord	59.06 in. x 1
Screw	No
Manual	
User Manual	1
Warranty Card	1

Ruijie | ReYee

 **R**edefine **y**our **e**asy network



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>